

RG-RAP1260 Reyee Wi-Fi 6 AX3000 Dual-Band Wall Plate Access Point

DATASHEET



/ Highlights

- Dual-radio performance, gigabit wireless wall-mounted AP
- Better experience with MU-MIMO under 802.11ax
- Multi-Color changable Cases
- Easy installation, worldwide compatible
- Capable of Reyee Mesh and 802.11K/V
- Powerful Standalone Portal via Ruijie Cloud


Highlight Features








Highlight Features

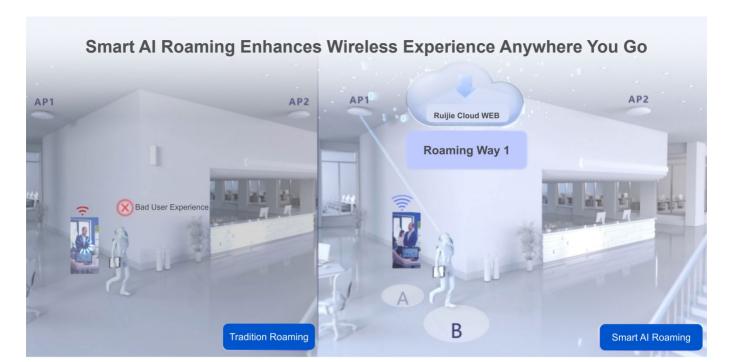






- Cloud portal authentication
- Remote monitoring and maintenance

.

.

- Upgrade firmware via Cloud
- APP library dynamically update

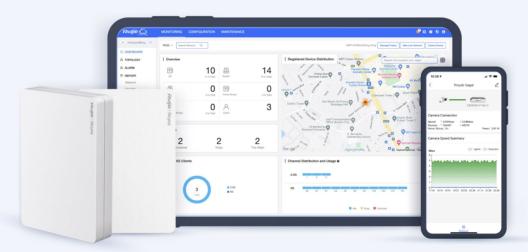



Basic Features		
Wi-Fi Standards	802.11a/n/ac/ax 802.11b/g/n/ax	
MIMO	2.4 GHz, 2x2, MU-MIMO 5 GHz, 2x2, MU-MIMO	
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps	
Number of Antennas	5	
Antenna Type	Built-in omnidirectional antennas	
Antenna Gain	2.4 GHz: 3 dBi 5 GHz: 5 dBi	
Transmit Power	EIRP: 26 dBm (2.4 GHz) 26 dBm (5 GHz) (country-specific restrictions apply) Myamar: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5850 MHz ≤ 25 dBm Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm	
Fixed Ports	1 x 10/100/1000Base-T Ethernet uplink port 4 x 10/100/1000Base-T Ethernet downlink ports 1 x Reset hole	
Max. Number of Concurrent STAs	512	
Recommended Number of Concurrent STAs	110	
Max. Number of SSIDs	8	
Supported Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz (country-specific restrictions apply)	
	Software Features	
	WLAN Basic Features	
Power Adjustment	✓	
Channel Bandwidth	2.4 GHz: Auto/20 MHz/40 MHz 5 GHz: Auto/20 MHz/40 MHz/80 MHz/160 MHz	
Roaming	Layer 2 roaming Layer 3 roaming 802.11k/v roaming	
OFDMA	✓	
Beamforming	✓	



	Software Features	
Target Wake Time (TWT)*	~	
Wi-Fi Multimedia (WMM))	~	
Radar Signal Detection and Frequency Hopping (DFS)	✓	
	WLAN Security	
Wi-Fi Password	16 characters	
Security Mode	WAP-PSK,WAP2-PSK,WPA-WAP2-PSK	
Blocklist and Allowlist	✓	
Enhanced User Experience		
Wi-Fi Optimization	✓	
STA Limiting	✓	
Removing Low-RSSI STAs	✓	
Removing Low-RSSI STAs	~	
Syslog Recording Why Users Lose Connection	~	
Auto Channel and Power Adjustment on Cloud	✓	
RSSI Threshold for STA Access	~	
Load Balancing	✓	
Networks		
Network Access Mode	PPPoE Client DHCP Client Static IP	
Avoidance of WAN IP Address Conflicts	✓	
VLAN	Port-based VLAN VLAN over 802.1Q TV projection screen	
DHCP Server	✓	

Specifications

System Sy		
Cloud Management	~	
App Management	✓	
App Upgrade	✓	
App Restart	✓	
Scheduled Restart	✓	
Default Access/Password	10.44.77.253 No Password Required by Default	
Local Upgrade	✓	
Online Upgrade	~	
Backup	✓	
Factory Reset	✓	
Language	Chinese English	
System Log	✓	
Diagnostics	✓	
Network Check	~	
	Hardware Features	
LED	1 x System status LED	
Reset Hole	1 x Reset hole	
Dimensions (W x D x H)	124 mm x 86 mm x 24 mm (4.88 in. x 3.89 in. x 0.94 in.)	
Weight	0.5 kg (1.10 lbs)	
Installation Method	In-wall mounting	
Mounting Bracket Dimensions (W x D x H)	122 mm x 80 mm x 3.8 mm (4.80 in. x 3.15 in. x 0.15 in.)	
Mounting Hole Pattern	Hole pattern 83.5 mm x 60 mm (3.29 in. x 2.36 in.)	
Mounting Hole Diameter	2.25 mm (0.09 in.)	

Specifications

Hardware Features		
Pole Diameter	N/A	
Power Supply	IEEE 802.3af/at PoE	
Max. Power Consumption	12 W	
PoE Power Budget	N/A	
Environment		
Operating Temperature	0°C to 40°C (32°F to 104°F)	
Storage Temperature	-40°C to +70°C (-40°F to +158°F)	
Operating Humidity	5% to 95% RH (non-condensing)	
Storage Humidity	5% to 95% RH (non-condensing)	
Ingress Protection Rating (IP Rating)	IP41	
Surge Protection	+/4kV	
MTBF	400,000 hours	

Package Contents

Package Information	RG-RAP1260
RG-RAP1260 Access Point	1
Power Adapter	N/A
User Manual	1
Cat5e UTP Cable	N/A
Mounting Bracket	1
Rack-mount Bracket	N/A
Screw	4
Certification	CE and CB

Warranty Card



Redefine your easy network

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein





Ruijie Networks Co., Ltd.
Building 19, Juyuanzhou Industrial Park, No.618
Jinshan Road, Cangshan District, Fuzhou, Fujian, China
Website: https://www.ruijienetworks.com